





Result: **601.0** (571)
 Series: 97.8 101.1 99.1 100.5 100.4 102.1
 Shot value: 34 23 3 0 0 0 0 0 0 0
 Inner ten: 25
 Furthest: 544 (3), 519 (45), 502 (49)
 Best divider 15.6 (28.) 18.3 (56.) 25.7 (21.)
 Shot position 0.84 mm Left, 0.64 mm High
 Dispersion value 1.80, Horizontal: 1.83, Vertical: 1.78

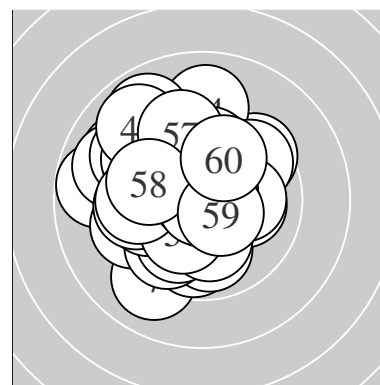


Series 1:
 9.1 ↖ 10.6 * 8.8 ← 10.3 * 9.9 ↗
 10.1 ↑ 9.1 ↙ 10.1 ↖ 9.0 ↖ 10.8 *
 Best divider 34.5 (10.) 99.1 (2.) 162.7 (4.)
 Shot position 1.68 mm Left, 0.73 mm High
 Dispersion value 2.17, Horizontal: 2.43, Vertical: 1.88




Series 2:
 10.5 * 10.6 * 10.7 * 9.7 ↑ 9.8 ↖
 10.3 * 9.8 ← 10.0 ← 9.5 ↗ 10.2 *
 Best divider 65.0 (13.) 96.4 (12.) 119.0 (11.)
 Shot position 0.46 mm Left, 1.14 mm High
 Dispersion value 1.50, Horizontal: 1.74, Vertical: 1.21




Series 3:
 10.9 * 9.8 ↓ 9.2 ↖ 9.0 ↑ 9.4 ←
 10.6 * 9.9 ↓ 10.9 * 9.7 ↗ 9.7 ↙
 Best divider 15.6 (28.) 25.7 (21.) 83.2 (26.)
 Shot position 0.61 mm Left, 0.03 mm High
 Dispersion value 2.21, Horizontal: 1.91, Vertical: 2.47



Series 4:
 10.6 * 10.0 ↙ 10.1 → 10.1 → 9.5 ↖
 9.8 ← 10.6 * 9.7 ↖ 10.1 ↓ 10.0 ↖
 Best divider 77.8 (37.) 90.8 (31.) 204.7 (39.)
 Shot position 0.55 mm Left, 0.03 mm High
 Dispersion value 1.76, Horizontal: 1.83, Vertical: 1.68



Series 5:
 10.7 * 10.5 * 10.7 * 9.9 ↑ 8.9 ↖
 10.6 * 10.4 * 9.6 ← 8.9 ↖ 10.2 *
 Best divider 51.7 (43.) 65.4 (41.) 85.0 (46.)
 Shot position 1.08 mm Left, 1.15 mm High
 Dispersion value 1.74, Horizontal: 1.57, Vertical: 1.89



Series 6:
 10.2 * 9.6 ← 10.6 * 10.8 * 10.2 *
 10.9 * 9.5 ↖ 9.8 ↖ 10.5 * 10.0 ↗
 Best divider 18.3 (56.) 42.9 (54.) 97.9 (53.)
 Shot position 0.69 mm Left, 0.77 mm High
 Dispersion value 1.44, Horizontal: 1.55, Vertical: 1.33

Meyton Elektronik

ISSF AR Men – *Competition* –

Firing point no: 38

LINDQUIST, Emil #247

StartNr: 73

29. November 2019 15:39

Köpings SKF

signature of shooter

Meyton Elektronik