





Result: **599.5** (572)
 Series: 96.5 99.5 101.7 101.6 99.3 100.9
 Shot value: 37 18 5 0 0 0 0 0 0 0
 Inner ten: 28
 Furthest: 651 (30), 632 (2), 559 (19)
 Best divider 21.0 (24.) 50.0 (33.) 51.6 (15.)
 Shot position 0.53 mm Left, 0.02 mm High
 Dispersion value 1.98, Horizontal: 1.93, Vertical: 2.03

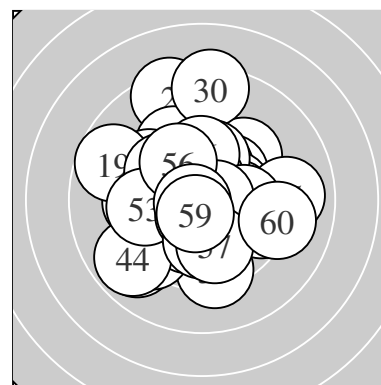


Series 1:
 9.5 ← 8.4 ↗ 9.6 ↗ 10.1 ↗ 9.8 ↗
 10.1 ↗ 10.0 ← 8.9 ↙ 10.6 * 9.5 ↘
 Best divider 88.4 (9.) 205.4 (6.) 224.1 (4.)
 Shot position 0.98 mm Left, 1.29 mm High
 Dispersion value 2.37, Horizontal: 2.11, Vertical: 2.61




Series 2:
 9.7 ← 9.7 ↙ 10.3 * 9.5 ↘ 10.7 *
 10.5 * 10.4 * 9.9 ↙ 8.7 ↘ 10.1 ←
 Best divider 51.6 (15.) 111.0 (16.) 131.3 (17.)
 Shot position 1.99 mm Left, 0.11 mm Low
 Dispersion value 1.53, Horizontal: 1.51, Vertical: 1.54




Series 3:
 10.4 * 10.2 * 10.2 * 10.9 * 9.8 ↘
 10.4 * 10.7 * 10.6 * 10.2 * 8.3 ↑
 Best divider 21.0 (24.) 51.8 (27.) 79.4 (28.)
 Shot position 0.08 mm Left, 0.27 mm High
 Dispersion value 1.91, Horizontal: 1.10, Vertical: 2.46



Series 4:
 10.6 * 10.2 * 10.8 * 10.3 * 9.3 ↓
 9.5 → 10.2 * 10.6 * 10.1 ↙ 10.0 ↑
 Best divider 50.0 (33.) 96.5 (38.) 99.4 (31.)
 Shot position 0.15 mm Right, 0.21 mm Low
 Dispersion value 1.72, Horizontal: 1.58, Vertical: 1.85



Series 5:
 9.3 ↙ 10.1 ↙ 10.5 * 8.9 ↙ 9.0 →
 9.9 ↑ 10.3 * 10.2 * 10.4 * 10.7 *
 Best divider 75.8 (50.) 120.0 (43.) 143.3 (49.)
 Shot position 0.53 mm Left, 0.42 mm Low
 Dispersion value 2.19, Horizontal: 2.38, Vertical: 1.97



Series 6:
 10.0 → 10.6 * 9.6 ← 10.5 * 10.0 ↓
 9.9 ↘ 9.9 ↓ 10.7 * 10.6 * 9.1 →
 Best divider 58.5 (58.) 78.2 (52.) 89.4 (59.)
 Shot position 0.21 mm Right, 0.63 mm Low
 Dispersion value 1.76, Horizontal: 2.09, Vertical: 1.34

Meyton Elektronik

ISSF AR Men – *Competition* –

Firing point no: 9

LINDQUIST, Emil #247

StartNr: 165

30. November 2019 10:57

Köpings SKF

signature of shooter

Meyton Elektronik