





Result: **601.2** (575)
 Series: 101.3 99.8 100.3 99.7 99.9 100.2
 Shot value: 38 19 3 0 0 0 0 0 0 0
 Inner ten: 25
 Furthest: 695 (10), 685 (51), 520 (25)
 Best divider 21.2 (27.) 29.1 (7.) 30.8 (3.)
 Shot position 0.72 mm Left, 0.57 mm Low
 Dispersion value 1.84, Horizontal: 1.93, Vertical: 1.74

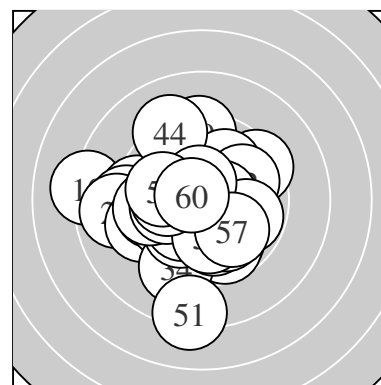


Series 1:
 10.5 * 9.9 ← 10.8 * 10.1 ← 10.7 *
 10.0 ↙ 10.8 * 10.5 * 9.8 ↘ 8.2 ←
 Best divider 29.1 (7.) 30.8 (3.) 51.6 (5.)
 Shot position 1.36 mm Left, 0.31 mm Low
 Dispersion value 1.79, Horizontal: 2.30, Vertical: 1.07




Series 2:
 9.4 ← 10.1 ↓ 9.7 ↗ 10.3 * 9.4 ↗
 10.6 * 10.3 * 10.5 * 9.3 ↑ 10.2 *
 Best divider 97.0 (16.) 117.4 (18.) 155.5 (14.)
 Shot position 0.63 mm Left, 0.13 mm Low
 Dispersion value 1.94, Horizontal: 1.83, Vertical: 2.04




Series 3:
 9.7 ↘ 10.5 * 9.1 ← 10.6 * 8.9 ←
 10.3 * 10.9 * 10.5 * 9.7 ↘ 10.1 ↓
 Best divider 21.2 (27.) 87.8 (24.) 113.3 (22.)
 Shot position 0.98 mm Left, 1.00 mm Low
 Dispersion value 1.82, Horizontal: 2.21, Vertical: 1.31



Series 4:
 9.4 ← 9.7 ← 9.9 ↙ 9.2 ↓ 10.5 *
 10.0 ↓ 10.0 ↗ 10.2 * 10.5 * 10.3 *
 Best divider 106.6 (35.) 110.4 (39.) 158.5 (40.)
 Shot position 1.05 mm Left, 0.58 mm Low
 Dispersion value 1.76, Horizontal: 1.70, Vertical: 1.82



Series 5:
 10.7 * 9.9 ↗ 10.0 ↘ 9.1 ↖ 10.0 ↙
 10.2 * 10.0 ↘ 10.5 * 9.7 ← 9.8 ↗
 Best divider 65.0 (41.) 113.0 (48.) 187.4 (46.)
 Shot position 0.20 mm Right, 0.32 mm Low
 Dispersion value 1.92, Horizontal: 2.03, Vertical: 1.80



Series 6:
 8.2 ↓ 10.7 * 9.9 ↘ 10.1 ← 10.1 ↓
 10.5 * 9.9 ↘ 10.1 ← 10.0 ← 10.7 *
 Best divider 68.8 (52.) 68.9 (60.) 105.3 (56.)
 Shot position 0.50 mm Left, 1.08 mm Low
 Dispersion value 1.94, Horizontal: 1.45, Vertical: 2.33

Meyton Elektronik

ISSF AR Men Jun – *Competition* –

Firing point no: 39

HYYTIÄINEN, Roope #225

StartNr: 232

30. November 2019 12:37

K-UAS

signature of shooter

Meyton Elektronik