





Result: **597.5** (573)
 Series: 98.2 102.2 98.9 99.0 99.2 100.0
 Shot value: 34 25 1 0 0 0 0 0 0 0
 Inner ten: 24
 Furthest: 541 (7), 469 (23), 463 (33)
 Best divider 27.5 (8.) 37.6 (32.) 43.9 (20.)
 Shot position 0.22 mm Right, 0.09 mm Low
 Dispersion value 1.99, Horizontal: 1.89, Vertical: 2.09

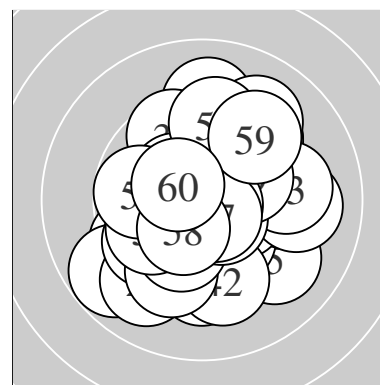


Series 1:
 10.2 * 9.4 ↙ 10.3 * 9.8 → 9.2 ↘
 9.4 ↗ 8.8 ↙ 10.8 * 9.9 ↑ 10.4 *
 Best divider 27.5 (8.) 140.6 (10.) 167.3 (3.)
 Shot position 0.30 mm Right, 0.30 mm Low
 Dispersion value 2.38, Horizontal: 2.58, Vertical: 2.16




Series 2:
 10.1 ↘ 10.2 * 9.9 ↗ 10.7 * 9.5 ↓
 10.1 ↙ 10.3 * 10.1 ↓ 10.5 * 10.8 *
 Best divider 43.9 (20.) 69.8 (14.) 115.6 (19.)
 Shot position 0.11 mm Left, 0.17 mm Low
 Dispersion value 1.53, Horizontal: 1.09, Vertical: 1.86




Series 3:
 10.2 * 10.4 * 9.1 ↙ 10.0 ↘ 9.4 ↓
 9.3 → 10.0 ↙ 9.9 ↘ 10.5 * 10.1 ←
 Best divider 102.0 (29.) 148.8 (22.) 193.1 (21.)
 Shot position 0.02 mm Right, 1.26 mm Low
 Dispersion value 1.92, Horizontal: 2.05, Vertical: 1.77



Series 4:
 10.2 * 10.8 * 9.1 ↑ 10.0 ↑ 9.1 →
 9.4 ↗ 9.6 ↘ 10.5 * 9.6 ↙ 10.7 *
 Best divider 37.6 (32.) 59.0 (40.) 123.3 (38.)
 Shot position 0.56 mm Right, 1.08 mm High
 Dispersion value 2.05, Horizontal: 2.04, Vertical: 2.07



Series 5:
 10.1 ↓ 9.4 ↓ 9.3 → 9.5 ↓ 10.4 *
 9.8 ↗ 10.0 ↙ 10.4 * 10.0 → 10.3 *
 Best divider 128.7 (48.) 147.5 (45.) 158.6 (50.)
 Shot position 0.66 mm Right, 0.59 mm Low
 Dispersion value 1.95, Horizontal: 1.71, Vertical: 2.17



Series 6:
 10.5 * 9.8 ↙ 10.7 * 9.1 ↗ 9.7 ←
 9.5 ↑ 10.6 * 10.3 * 9.4 ↗ 10.4 *
 Best divider 73.0 (53.) 98.5 (57.) 101.3 (51.)
 Shot position 0.10 mm Left, 0.71 mm High
 Dispersion value 1.96, Horizontal: 1.88, Vertical: 2.04

Meyton Elektronik

ISSF AR Men Jun – *Competition* –

Firing point no: 41

TURUNEN, Antti #226

StartNr: 234

30. November 2019 12:52

K-UAS

signature of shooter

Meyton Elektronik