





Result: **617.6** (590)  
 Series: 104.1 102.2 103.1 102.3 102.7 103.2  
 Shot value: 50 10 0 0 0 0 0 0 0 0  
 Inner ten: 40  
 Furthest: 414 (59), 390 (27), 365 (42)  
 Best divider 10.6 (1.) 24.5 (52.) 27.3 (26.)  
 Shot position 0.77 mm Right, 0.02 mm Low  
 Dispersion value 1.26, Horizontal: 1.38, Vertical: 1.12

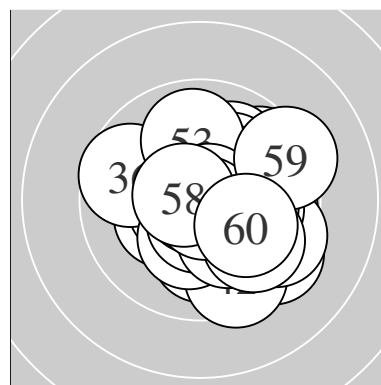


Series 1:  
 10.9 \*                      10.4 \*                      10.2 \*                      10.4 \*                      10.0 →  
 10.4 \*                      10.5 \*                      10.5 \*                      10.4 \*                      10.4 \*  
 Best divider 10.6 (1.) 108.0 (8.) 122.1 (7.)  
 Shot position 0.40 mm Right, 0.33 mm High  
 Dispersion value 1.01, Horizontal: 1.26, Vertical: 0.67




Series 2:  
 10.0 →                      10.6 \*                      9.7 ↗                      10.3 \*                      10.4 \*  
 10.0 ↗                      10.3 \*                      10.7 \*                      10.4 \*                      9.8 →  
 Best divider 64.5 (18.) 96.1 (12.) 133.7 (19.)  
 Shot position 1.19 mm Right, 0.39 mm High  
 Dispersion value 1.17, Horizontal: 1.35, Vertical: 0.97




Series 3:  
 10.4 \*                      10.6 \*                      10.3 \*                      10.2 \*                      10.0 →  
 10.8 \*                      9.4 ↘                      10.6 \*                      10.1 ↗                      10.7 \*  
 Best divider 27.3 (26.) 74.0 (30.) 80.6 (28.)  
 Shot position 0.95 mm Right, 0.04 mm High  
 Dispersion value 1.21, Horizontal: 1.27, Vertical: 1.15



Series 4:  
 10.3 \*                      10.6 \*                      10.3 \*                      10.0 ↘                      10.8 \*  
 9.7 ↖                      10.3 \*                      9.8 →                      10.4 \*                      10.1 ↓  
 Best divider 48.1 (35.) 94.6 (32.) 137.2 (39.)  
 Shot position 0.24 mm Right, 0.10 mm Low  
 Dispersion value 1.49, Horizontal: 1.74, Vertical: 1.19



Series 5:  
 10.8 \*                      9.5 ↘                      9.5 ↘                      10.0 →                      10.3 \*  
 10.8 \*                      10.8 \*                      10.3 \*                      10.6 \*                      10.1 →  
 Best divider 39.6 (41.) 49.2 (47.) 50.0 (46.)  
 Shot position 0.98 mm Right, 0.77 mm Low  
 Dispersion value 1.24, Horizontal: 1.33, Vertical: 1.13



Series 6:  
 10.8 \*                      10.9 \*                      9.9 ↑                      10.2 \*                      9.8 ↘  
 10.8 \*                      10.8 \*                      10.7 \*                      9.3 →                      10.0 ↘  
 Best divider 24.5 (52.) 41.1 (56.) 42.1 (57.)  
 Shot position 0.89 mm Right, 0.03 mm Low  
 Dispersion value 1.39, Horizontal: 1.40, Vertical: 1.38

Meyton Elektronik

**ISSF AR Women – Competition –**

Firing point no: 44

**PETERSEN, Betina** #137

**StartNr: 321**

30. November 2019 16:38

Ølstykke Skf.

---

signature of shooter

Meyton Elektronik