





Result: **551** (578.8)
 Series: 92 92 88 91 94 94
 Shot value: 23 26 10 1 0 0 0 0 0 0
 Inner ten: 10
 Furthest: 2620 (36), 2237 (8), 2103 (23)
 Best divider 108.9 (2.) 278.4 (47.) 290.6 (50.)
 Shot position 2.02 mm Left, 1.88 mm Low
 Dispersion value 8.16, Horizontal: 7.74, Vertical: 8.56

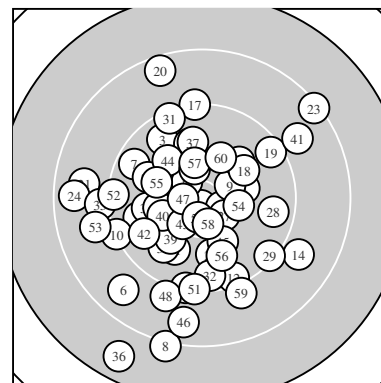


Series 1:
 9.7 ← 10.8 * 9.7 ↘ 10.2 → 10.6 *
 8.7 ↙ 9.6 ↖ 8.2 ↓ 10.4 * 9.3 ←
 Best divider 108.9 (2.) 310.1 (5.) 451.4 (9.)
 Shot position 4.14 mm Left, 2.89 mm Low
 Dispersion value 7.96, Horizontal: 6.90, Vertical: 8.90




Series 2:
 9.9 ↙ 9.4 ↓ 10.5 * 8.9 ↘ 10.1 ←
 10.0 ↗ 9.2 ↑ 10.0 ↖ 9.4 ↗ 8.5 ↖
 Best divider 323.2 (13.) 641.0 (15.) 735.8 (18.)
 Shot position 2.08 mm Right, 2.17 mm High
 Dispersion value 8.48, Horizontal: 7.04, Vertical: 9.70




Series 3:
 8.8 ← 9.9 ↓ 8.3 ↗ 8.6 ← 9.9 ↑
 9.9 ↖ 10.4 * 9.6 → 9.3 ↘ 9.3 ↓
 Best divider 414.5 (27.) 814.5 (25.) 835.9 (22.)
 Shot position 0.68 mm Left, 0.79 mm Low
 Dispersion value 9.93, Horizontal: 11.58, Vertical: 7.94



Series 4:
 9.4 ↖ 9.5 ↓ 9.8 ↙ 9.9 ← 9.1 ←
 7.7 ↙ 9.9 ↑ 10.1 ← 10.0 ↙ 10.2 ←
 Best divider 632.5 (40.) 653.6 (38.) 751.9 (39.)
 Shot position 6.25 mm Left, 3.43 mm Low
 Dispersion value 7.64, Horizontal: 4.70, Vertical: 9.73



Series 5:
 8.9 ↗ 9.7 ↖ 10.4 * 10.0 ↘ 10.1 ↓
 8.7 ↓ 10.6 * 9.0 ↓ 10.4 * 10.6 *
 Best divider 278.4 (47.) 290.6 (50.) 436.1 (49.)
 Shot position 1.18 mm Left, 3.25 mm Low
 Dispersion value 7.41, Horizontal: 6.16, Vertical: 8.48



Series 6:
 9.3 ↓ 9.3 ← 8.9 ← 10.3 → 10.1 ↖
 9.8 ↓ 10.3 ↑ 10.5 * 9.1 ↓ 10.1 ↗
 Best divider 387.8 (58.) 526.4 (57.) 549.1 (54.)
 Shot position 1.98 mm Left, 3.10 mm Low
 Dispersion value 7.26, Horizontal: 7.45, Vertical: 7.06

Meyton Elektronik

ISSF AP Men – *Competition* –

Firing point no: 18

WOLL, Ingar #106

StartNr: 338

1. December 2019 9:38

Bærum PK

signature of shooter

Meyton Elektronik