





Result: **583.3** (553)
 Series: 102.1 94.2 99.9 95.9 95.5 95.7
 Shot value: 25 25 9 0 1 0 0 0 0 0
 Inner ten: 21
 Furthest: 1015 (44), 713 (53), 674 (16)
 Best divider 37.2 (3.) 42.0 (50.) 51.1 (15.)
 Shot position 0.49 mm Left, 0.32 mm Low
 Dispersion value 2.57, Horizontal: 2.88, Vertical: 2.22

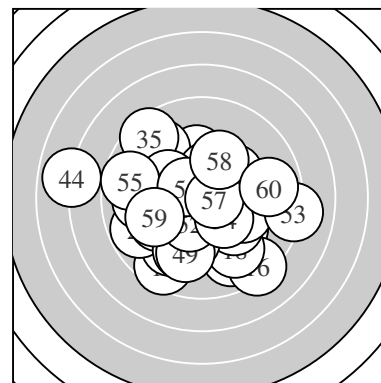


Series 1:
 10.2 * 10.1 ↘ 10.8 * 9.5 → 9.7 ↑
 10.3 * 10.6 * 10.4 * 10.3 * 10.2 *
 Best divider 37.2 (3.) 97.5 (7.) 142.1 (8.)
 Shot position 0.03 mm Right, 0.81 mm High
 Dispersion value 1.45, Horizontal: 1.56, Vertical: 1.34




Series 2:
 8.9 ↘ 8.6 ↘ 10.3 * 9.5 ↘ 10.7 *
 8.3 ↘ 9.2 ↘ 9.1 ↘ 10.7 * 8.9 ←
 Best divider 51.1 (15.) 64.7 (19.) 171.9 (13.)
 Shot position 0.12 mm Right, 2.09 mm Low
 Dispersion value 2.88, Horizontal: 2.94, Vertical: 2.82




Series 3:
 9.6 ↑ 9.7 ↘ 8.8 ← 9.9 ↗ 10.6 *
 9.9 ← 10.7 * 10.4 * 10.5 * 9.8 ←
 Best divider 70.0 (27.) 96.2 (25.) 121.0 (29.)
 Shot position 0.90 mm Left, 0.28 mm Low
 Dispersion value 1.93, Horizontal: 2.03, Vertical: 1.83



Series 4:
 9.6 → 9.7 ← 10.4 * 9.0 ↘ 8.5 ↘
 10.4 * 9.4 ← 9.2 ↘ 10.1 ↑ 9.6 ↘
 Best divider 146.0 (33.) 148.3 (36.) 209.0 (39.)
 Shot position 1.15 mm Left, 0.06 mm High
 Dispersion value 2.62, Horizontal: 2.48, Vertical: 2.74



Series 5:
 10.5 * 9.6 ↘ 9.7 ↗ 6.9 ← 9.6 →
 9.1 ← 10.6 * 9.5 ← 9.2 ↘ 10.8 *
 Best divider 42.0 (50.) 88.4 (47.) 109.2 (41.)
 Shot position 1.29 mm Left, 0.58 mm Low
 Dispersion value 3.09, Horizontal: 3.91, Vertical: 1.94



Series 6:
 9.8 ↘ 10.1 ↘ 8.1 → 10.0 ↘ 8.7 ←
 10.4 * 10.6 * 9.7 ↑ 9.4 ← 8.9 →
 Best divider 95.1 (57.) 144.8 (56.) 211.0 (52.)
 Shot position 0.22 mm Right, 0.12 mm High
 Dispersion value 2.96, Horizontal: 3.86, Vertical: 1.60

Meyton Elektronik

ISSF AR Men Jun – *Competition* –

Firing point no: 23

KANNIK, Mikkel #186

StartNr: 386

1. December 2019 11:58

Ølstykke Skf.

signature of shooter

Meyton Elektronik