





Result: **588.2** (560)
 Series: 103.3 98.9 100.8 91.0 100.4 93.8
 Shot value: 29 23 7 1 0 0 0 0 0 0
 Inner ten: 19
 Furthest: 860 (33), 668 (20), 660 (32)
 Best divider 13.0 (12.) 57.0 (27.) 61.0 (2.)
 Shot position 0.56 mm Right, 0.28 mm Low
 Dispersion value 2.38, Horizontal: 2.32, Vertical: 2.45

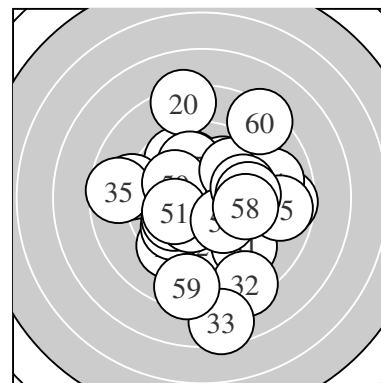


Series 1:
 9.9 → 10.7 * 10.6 * 10.0 ← 10.7 *
 10.5 * 10.0 ↘ 10.2 * 10.7 * 10.0 ↖
 Best divider 61.0 (2.) 71.8 (9.) 75.9 (5.)
 Shot position 0.28 mm Left, 0.23 mm High
 Dispersion value 1.29, Horizontal: 1.50, Vertical: 1.03




Series 2:
 9.8 ↘ 10.9 * 9.9 ↗ 9.4 ↓ 9.5 ↓
 9.7 ↖ 10.4 * 10.6 * 10.4 * 8.3 ↑
 Best divider 13.0 (12.) 100.2 (18.) 132.1 (19.)
 Shot position 0.19 mm Left, 0.22 mm High
 Dispersion value 2.38, Horizontal: 1.12, Vertical: 3.18




Series 3:
 10.6 * 10.6 * 10.5 * 9.4 ↗ 10.2 *
 9.7 ↓ 10.7 * 9.8 ↖ 9.4 ↗ 9.9 ↗
 Best divider 57.0 (27.) 83.1 (21.) 89.0 (22.)
 Shot position 0.21 mm Right, 0.98 mm Low
 Dispersion value 1.73, Horizontal: 1.69, Vertical: 1.76



Series 4:
 9.2 ↘ 8.3 ↘ 7.5 ↓ 9.0 ← 8.6 ←
 10.2 * 9.8 → 10.0 ↖ 8.7 → 9.7 →
 Best divider 177.4 (36.) 237.0 (38.) 299.8 (37.)
 Shot position 0.48 mm Right, 1.73 mm Low
 Dispersion value 3.52, Horizontal: 3.81, Vertical: 3.20



Series 5:
 10.6 * 9.8 → 9.7 → 10.0 ↗ 10.6 *
 10.0 ↗ 10.0 ↖ 9.3 ↗ 10.3 * 10.1 ↖
 Best divider 89.8 (45.) 93.3 (41.) 169.0 (49.)
 Shot position 0.82 mm Right, 0.63 mm High
 Dispersion value 1.69, Horizontal: 1.93, Vertical: 1.41



Series 6:
 10.1 ← 9.8 ↗ 10.1 ↘ 9.0 → 8.8 →
 9.8 → 9.7 → 9.7 → 8.5 ↓ 8.3 ↗
 Best divider 209.7 (51.) 212.2 (53.) 279.5 (52.)
 Shot position 2.36 mm Right, 0.05 mm Low
 Dispersion value 2.62, Horizontal: 2.34, Vertical: 2.87

Meyton Elektronik

ISSF AR Men Jun – *Competition* –

Firing point no: 28

TURUNEN, Antti #226

StartNr: 391

1. December 2019 11:58

K-UAS

signature of shooter

Meyton Elektronik