





Result: **598.7** (571)
 Series: 100.7 102.1 99.8 96.8 101.2 98.1
 Shot value: 34 23 3 0 0 0 0 0 0 0
 Inner ten: 27
 Furthest: 575 (34), 558 (55), 540 (54)
 Best divider 35.4 (42.) 36.4 (52.) 49.7 (19.)
 Shot position 0.34 mm Left, 0.95 mm High
 Dispersion value 1.86, Horizontal: 1.63, Vertical: 2.06

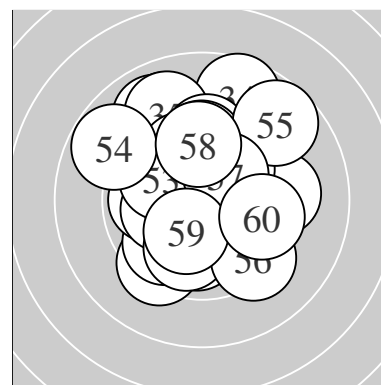


Series 1:
 9.3 → 9.8 ↖ 10.7 * 10.6 * 10.4 *
 10.6 * 9.3 ↑ 10.3 * 10.1 ↓ 9.6 ↗
 Best divider 75.1 (3.) 87.6 (4.) 93.0 (6.)
 Shot position 0.49 mm Right, 1.33 mm High
 Dispersion value 1.57, Horizontal: 1.46, Vertical: 1.67




Series 2:
 9.8 ↑ 10.6 * 10.2 * 9.9 ↓ 10.2 *
 10.5 * 9.0 ↖ 10.6 * 10.8 * 10.5 *
 Best divider 49.7 (19.) 91.1 (18.) 98.3 (12.)
 Shot position 0.27 mm Left, 0.47 mm High
 Dispersion value 1.61, Horizontal: 0.99, Vertical: 2.05




Series 3:
 10.3 * 9.3 ↖ 10.2 * 10.0 ↘ 10.4 *
 9.7 ↑ 10.7 * 10.1 ← 9.0 ↖ 10.1 ↗
 Best divider 55.7 (27.) 143.3 (25.) 151.8 (21.)
 Shot position 0.63 mm Left, 1.56 mm High
 Dispersion value 1.62, Horizontal: 1.43, Vertical: 1.79



Series 4:
 9.4 ↙ 10.2 * 9.5 ↖ 8.7 ↑ 9.0 ↖
 10.5 * 9.6 ↑ 9.9 ↑ 9.8 ↑ 10.2 *
 Best divider 125.0 (36.) 178.5 (32.) 179.7 (40.)
 Shot position 0.51 mm Left, 1.92 mm High
 Dispersion value 2.12, Horizontal: 1.41, Vertical: 2.64



Series 5:
 10.0 ← 10.8 * 9.9 ↖ 10.3 * 9.8 ↙
 10.3 * 9.9 ← 10.1 ← 9.9 ↓ 10.2 *
 Best divider 35.4 (42.) 151.4 (46.) 162.0 (44.)
 Shot position 1.48 mm Left, 0.27 mm Low
 Dispersion value 1.21, Horizontal: 0.84, Vertical: 1.49



Series 6:
 10.7 * 10.8 * 10.0 ↘ 8.8 ↘ 8.7 ↗
 9.3 ↘ 10.2 * 9.8 ↑ 10.2 * 9.6 →
 Best divider 36.4 (52.) 70.8 (51.) 181.0 (57.)
 Shot position 0.37 mm Right, 0.71 mm High
 Dispersion value 2.39, Horizontal: 2.56, Vertical: 2.21

Meyton Elektronik

ISSF AR Women Jun – Competition –

Firing point no: 39

ANDERSSON, Denize #248

StartNr: 446

1. December 2019 13:44

Köpings SKF

signature of shooter

Meyton Elektronik