





Result: **607.8** (581)
 Series: 103.1 99.1 101.2 100.8 102.5 101.1
 Shot value: 42 17 1 0 0 0 0 0 0 0
 Inner ten: 31
 Furthest: 521 (14), 432 (21), 417 (25)
 Best divider 12.0 (44.) 29.1 (28.) 40.4 (32.)
 Shot position 0.17 mm Left, 0.07 mm High
 Dispersion value 1.68, Horizontal: 1.59, Vertical: 1.77

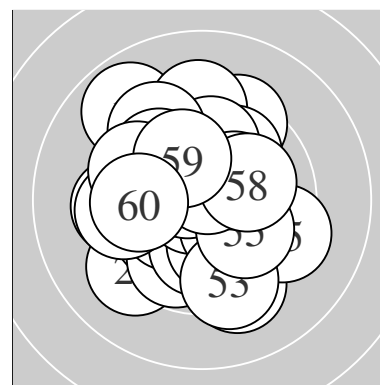


Series 1:
 10.4 * 10.3 * 10.1 ↘ 10.4 * 10.3 *
 10.4 * 10.5 * 10.6 * 9.4 ← 10.7 *
 Best divider 53.4 (10.) 79.4 (8.) 125.0 (7.)
 Shot position 0.37 mm Left, 0.17 mm High
 Dispersion value 1.32, Horizontal: 1.59, Vertical: 0.99




Series 2:
 10.5 * 9.8 ↓ 10.7 * 8.9 ↘ 10.1 ↗
 9.9 ↖ 9.4 ↑ 10.2 * 10.3 * 9.3 ↑
 Best divider 70.5 (13.) 111.6 (11.) 162.3 (19.)
 Shot position 0.05 mm Left, 1.31 mm High
 Dispersion value 1.97, Horizontal: 1.61, Vertical: 2.28




Series 3:
 9.2 ↙ 10.0 ↘ 9.9 ↗ 10.2 * 9.3 ↓
 10.3 * 10.6 * 10.8 * 10.6 * 10.3 *
 Best divider 29.1 (28.) 91.9 (27.) 93.2 (29.)
 Shot position 0.29 mm Left, 0.54 mm Low
 Dispersion value 1.76, Horizontal: 1.56, Vertical: 1.93



Series 4:
 10.5 * 10.8 * 9.9 ↑ 9.8 ↓ 9.4 →
 10.1 ↓ 10.0 ↓ 10.7 * 10.2 * 9.4 ↖
 Best divider 40.4 (32.) 62.9 (38.) 119.8 (31.)
 Shot position 0.03 mm Right, 0.22 mm Low
 Dispersion value 1.83, Horizontal: 1.60, Vertical: 2.04



Series 5:
 10.1 ↓ 10.1 ← 9.8 ↖ 10.9 * 10.7 *
 10.1 ↓ 10.8 * 10.3 * 10.2 * 9.5 ←
 Best divider 12.0 (44.) 48.7 (47.) 69.9 (45.)
 Shot position 0.41 mm Left, 0.37 mm Low
 Dispersion value 1.45, Horizontal: 1.64, Vertical: 1.22



Series 6:
 9.6 ↖ 10.6 * 9.4 ↓ 10.5 * 10.0 ↘
 10.3 * 10.7 * 10.1 → 10.1 ↗ 9.8 ←
 Best divider 72.4 (57.) 82.2 (52.) 119.6 (54.)
 Shot position 0.07 mm Right, 0.11 mm High
 Dispersion value 1.74, Horizontal: 1.88, Vertical: 1.59

Meyton Elektronik

ISSF AR Men – Competition –

Firing point no: 18

LINDQUIST, Emil #247

StartNr: 461

1. December 2019 15:42

Köpings SKF

signature of shooter

Meyton Elektronik