





Result: **522** (551.7)
 Series: 88 83 85 87 89 90
 Shot value: 10 28 17 4 1 0 0 0 0 0
 Inner ten: 4
 Furthest: 3711 (13), 2926 (18), 2512 (9)
 Best divider 269.6 (15.) 353.9 (1.) 402.1 (57.)
 Shot position 3.04 mm Right, 1.69 mm High
 Dispersion value 10.76, Horizontal: 10.28, Vertical: 11.22

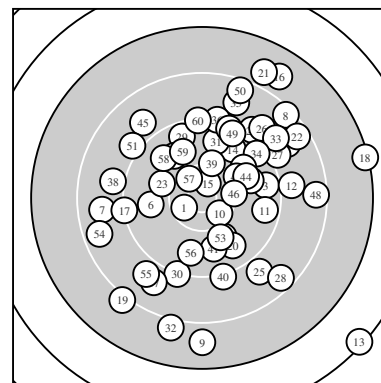


Series 1:
 10.5 * 10.0 ↘ 9.5 → 9.8 → 8.8 ↗
 9.8 ← 8.8 ← 8.4 ↗ 7.8 ↓ 10.4 *
 Best divider 353.9 (1.) 403.8 (10.) 768.7 (2.)
 Shot position 2.64 mm Right, 1.02 mm Low
 Dispersion value 10.45, Horizontal: 10.41, Vertical: 10.50




Series 2:
 9.6 → 9.0 → 6.3 ↘ 9.7 ↗ 10.6 *
 7.8 ↗ 9.2 ← 7.3 → 8.1 ↗ 9.7 ↘
 Best divider 269.6 (15.) 984.7 (20.) 1001.8 (14.)
 Shot position 8.00 mm Right, 1.39 mm Low
 Dispersion value 13.89, Horizontal: 14.51, Vertical: 13.25




Series 3:
 7.9 ↗ 8.5 ↗ 10.0 ↖ 9.1 ↗ 8.9 ↘
 8.9 ↗ 9.1 → 8.5 ↘ 9.5 ↗ 9.2 ↓
 Best divider 740.8 (23.) 1123.8 (29.) 1392.6 (30.)
 Shot position 6.85 mm Right, 3.73 mm High
 Dispersion value 10.80, Horizontal: 8.47, Vertical: 12.71



Series 4:
 9.7 ↗ 8.0 ↓ 8.9 ↗ 9.4 ↗ 8.7 ↗
 9.2 ↗ 8.8 ↘ 9.0 ← 10.2 ↗ 9.2 ↘
 Best divider 626.7 (39.) 1015.2 (31.) 1224.1 (34.)
 Shot position 0.94 mm Right, 1.61 mm High
 Dispersion value 11.33, Horizontal: 8.51, Vertical: 13.57



Series 5:
 9.8 ↓ 9.8 ↗ 10.1 ↗ 9.9 → 8.9 ↖
 10.2 → 9.3 ↗ 8.5 → 9.4 ↗ 8.5 ↗
 Best divider 563.2 (46.) 707.5 (43.) 855.9 (44.)
 Shot position 5.46 mm Right, 6.04 mm High
 Dispersion value 7.61, Horizontal: 7.28, Vertical: 7.92



Series 6:
 9.1 ↖ 9.9 ↖ 10.0 ↓ 8.6 ← 8.9 ↖
 9.7 ↓ 10.4 * 9.7 ↖ 9.9 ↗ 9.3 ↗
 Best divider 402.1 (57.) 757.3 (53.) 870.0 (59.)
 Shot position 5.62 mm Left, 1.23 mm High
 Dispersion value 7.90, Horizontal: 6.17, Vertical: 9.31

Meyton Elektronik

ISSF AP Men – *Competition* –

Firing point no: 6

Larsen, Marinus B. #328

StartNr: 250

28. November 2021 9:49

Ramløse

signature of shooter

Meyton Elektronik